


# Assembling Your C-64


For set-up of your new Commodore 64 system, follow these instructions STEP BY STEP.

1. First, locate the box with the ORGANIZER in it. The purpose of the organizer is to house the C-64 and enable the monitor to sit with the C-64. Open up the Organizer.
2. Locate the KEYBOARD. Fit it into the bottom half of the Organizer. The POWER SUPPLY (shipped with Keyboard) should be placed inside Organizer and secured if possible. Two cords are attached to the Power Supply. One is to be hooked into your outlet and the other hooks into the right side of the keyboard (only one place available).
3. Remove DISK DRIVE from packaging. There are two cords enclosed. The POWER CORD connects from back of Disk Drive to outlet. The CONNECTOR CABLE goes from the back of the Disk Drive to the back of the keyboard (right hole).
4. Unpack MONITOR. First connect MONITOR CABLE to back of keyboard (left hole), feed through back of organizer and hook-up COLOUR CO-ORDINATED CONNECTORS to back of Monitor (red, white and yellow). Plug cord on back of Monitor into outlet. Place Monitor on top of Organizer.
5. Turn ON SYSTEM IN THIS ORDER:

1. Disk Drive
2. Monitor
3. Keyboard

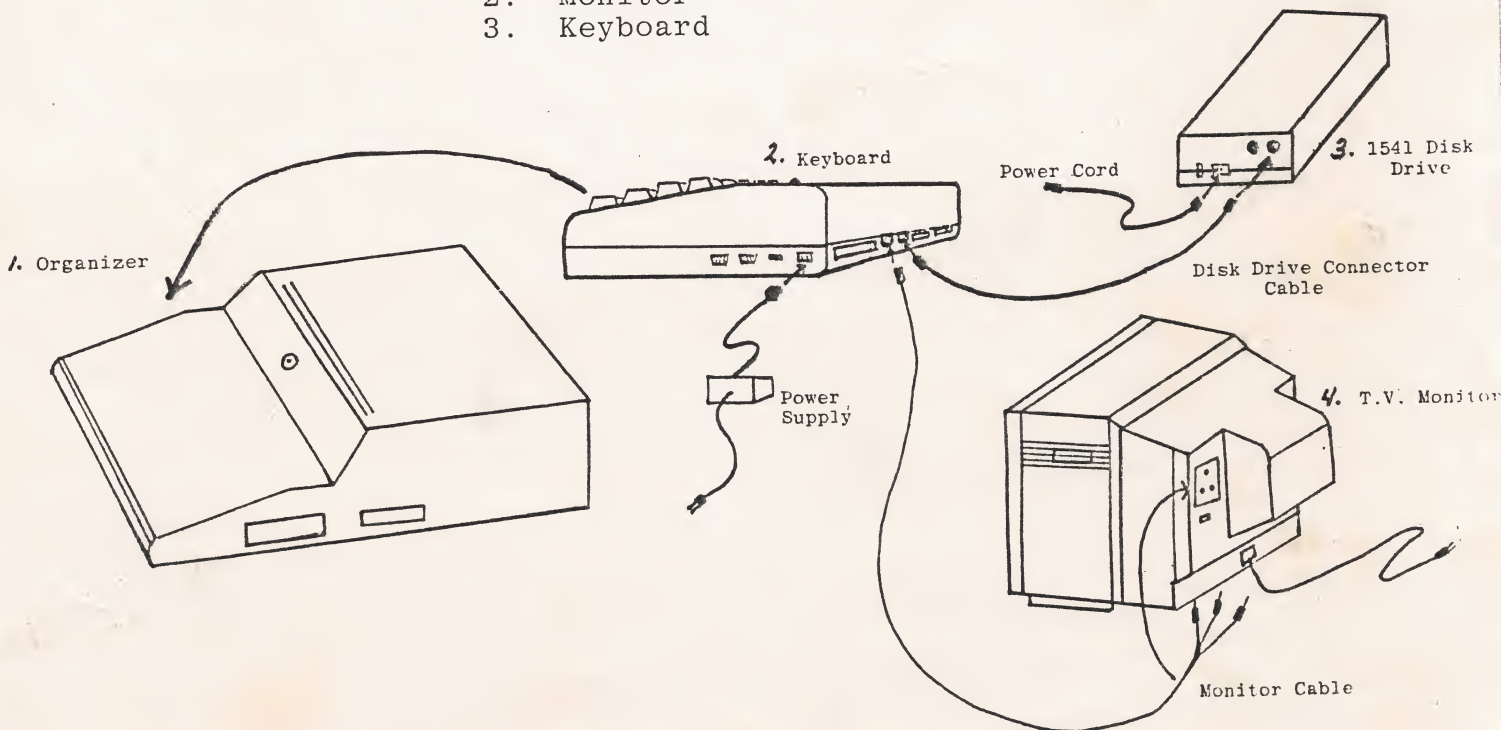


BACK OF KEYBOARD

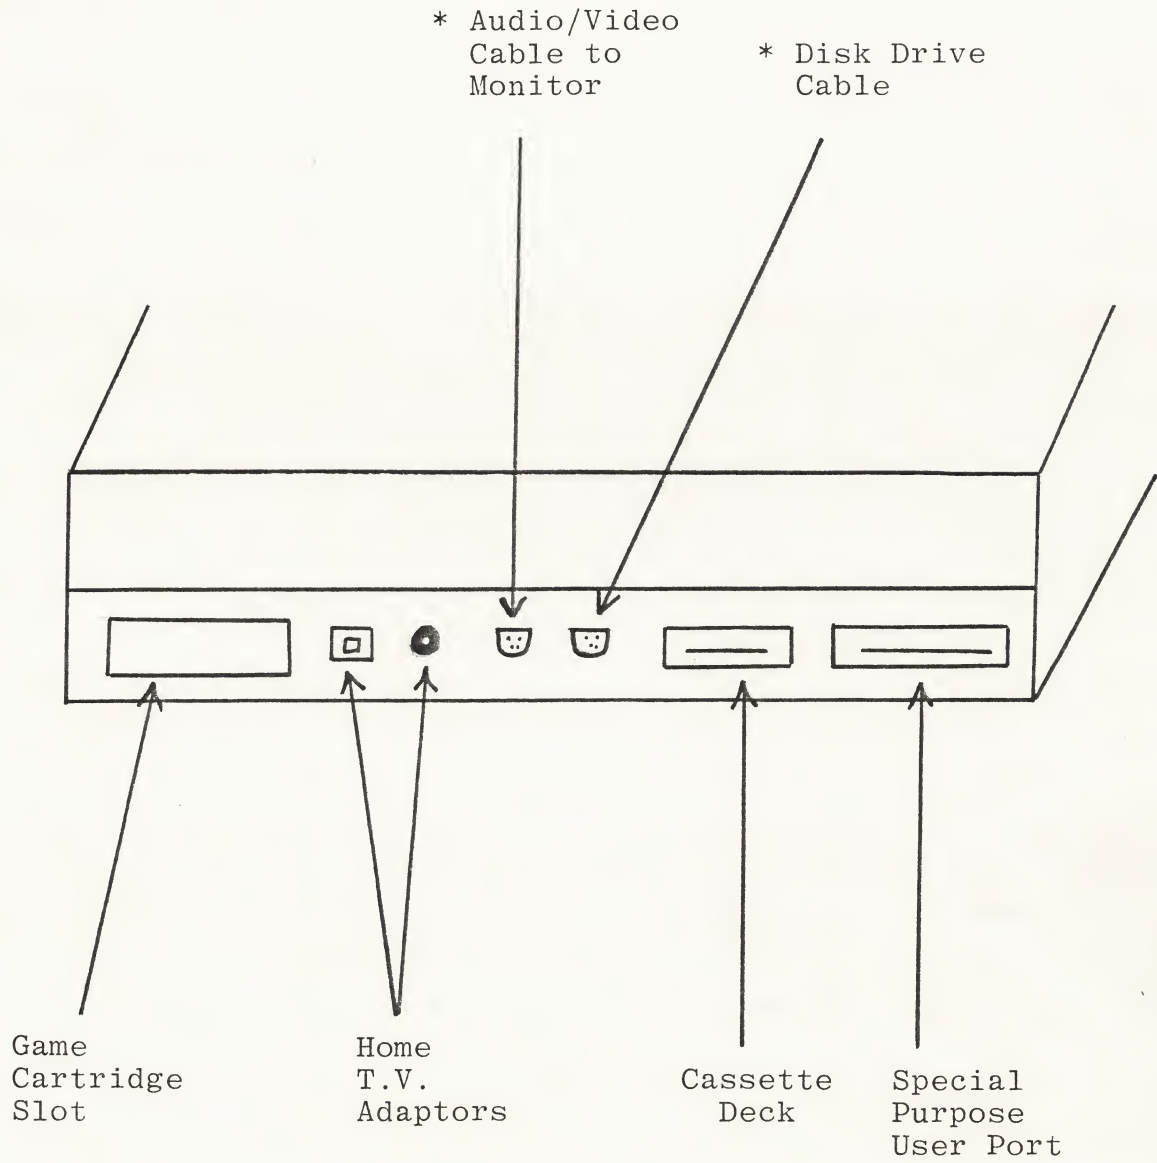

## BACK OF DISK DRIVE

### SPECIAL C-64 PRINTER INTERFACE

The printer contains a special circuit board which allows it to communicate directly with a C-64 computer. Plug the round din cable into the left-most round port in the back of the 1541 disk drive.

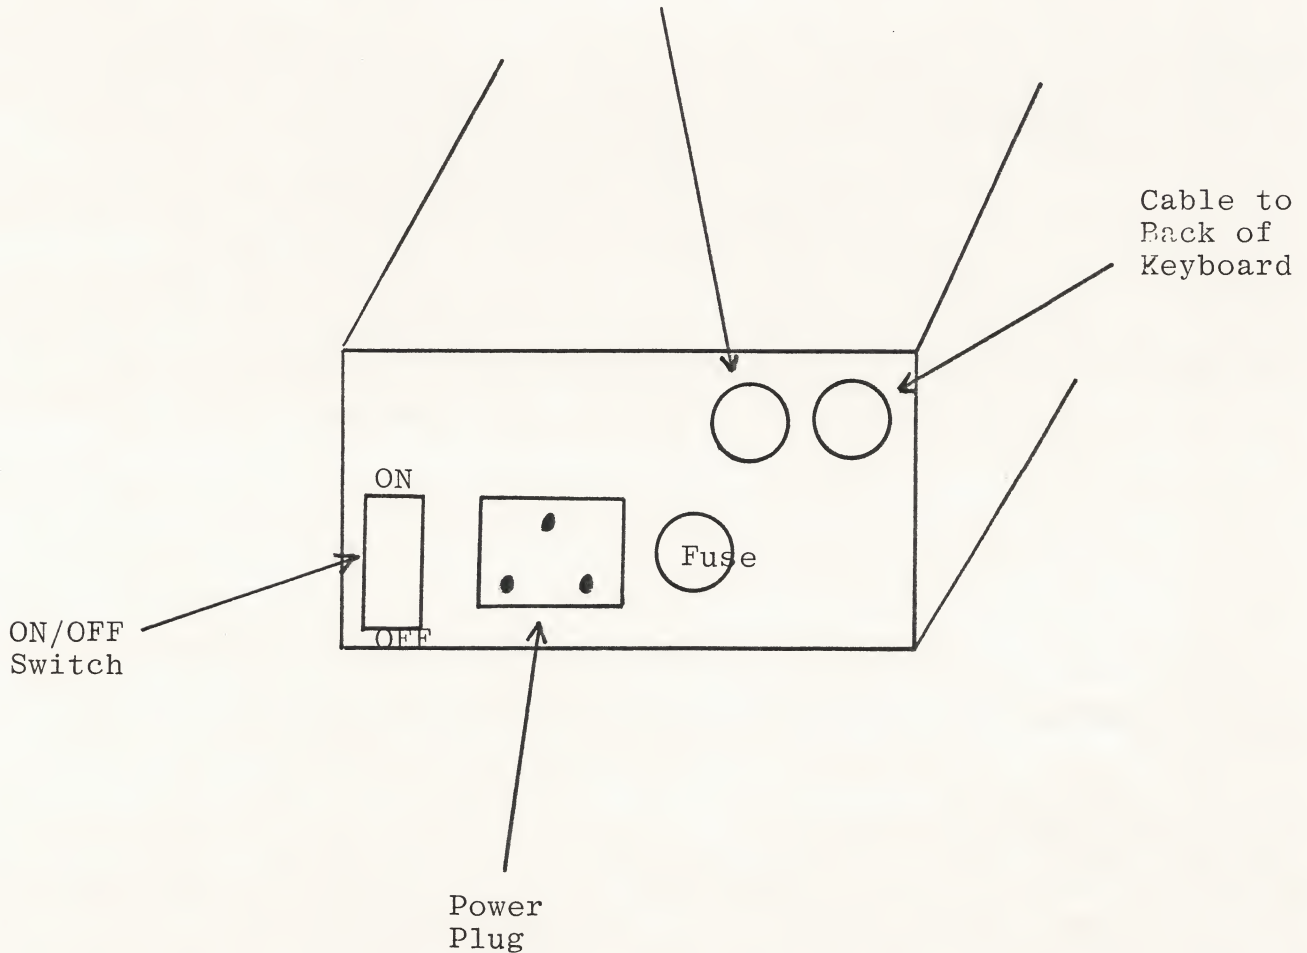

FOR TECHNICAL ASSISTANCE CALL:

Computer Studies Department,  
Education Centre - 527-5092,  
Ext. 315

WHO TO CALL
-------------

COMPUTER REPAIRS

- Computer Repair Shop  
Dundurn Warehouse  
Education Centre  
527-5092 - Ext. 390

PRINTER PAPER/  
PRINTER RIBBONS

- Ron Rasian  
Education Centre  
Ext. 254

GENERAL ENQUIRIES  
& STAFF IN-SERVICE

- Computer Studies Office  
Education Centre  
Ext. 315